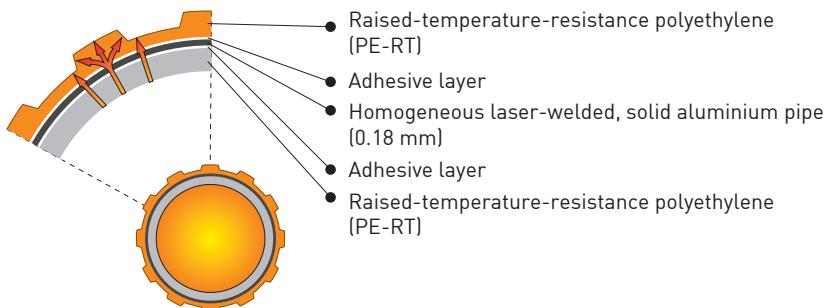
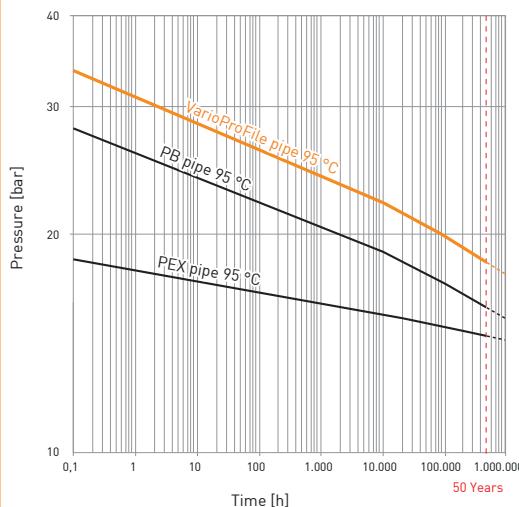
**15 % larger surface**

- optimised heat transfer
- better plaster adhesion

**Creep behaviour****Advantages**


- Fully corrosion-free
- Optimum behaviour under long-term stress
- As light as a plastic pipe
- 10-year guarantee with certificate
- Flexible, easy to bend, extremely good hydrostatic stability
- Resistant to hot water additives (inhibitors, antifreeze)
- Mirror-smooth inner surface – less pressure loss – no encrustation
- High pressure and temperature resistance (10 bar, +95 °C)
- 100% oxygen diffusion-tight
- Lower linear coefficient of expansion, lower heat expansion forces
- Tested as per EN 21003, SKZ A 397

Elongation of different tubings with 10 m and temperature difference Δt 25 °C (e.g. 20 °C to 45 °C)

Tubings	Elongation	
Plastics	PEX	50.00 mm
	PP	42.50 mm
	PB	32.50 mm
	PVC	20.00 mm
Metal	VarioProFile pipe	5.75 mm
	Cu	4.20 mm
	Stainless steel	3.50 mm
	Steel	2.88 mm

Homogeneous plastic pipes produce high stress levels in the device because of their expansion coefficient.

The VarioProFile pipe combines the minor elongation and thermal expansion. So it is perfect for surface heating- and -cooling pipes.

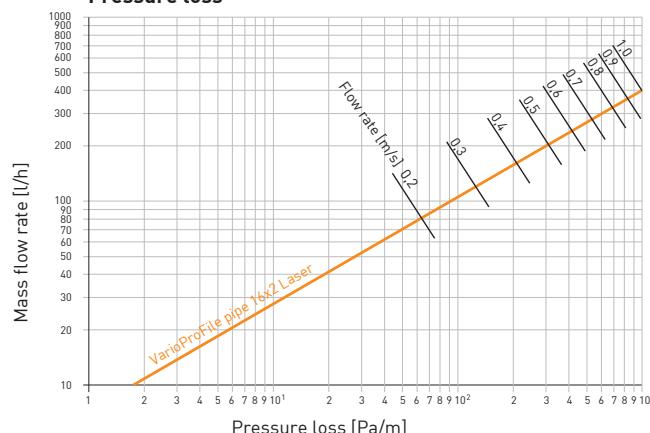Pressure loss**Technical data**

- Pipe diameter: 16 mm
 Pipe wall thickness: 2 mm
 Aluminium pipe thickness: 0.18 mm
 Roll length: 100/300/500 m
 Water content: 0.113 l/m
 Special narrow bending radius: 40 mm (use a suitable bending device)
 Max. operating temperature: $t_{max} = 95 \text{ }^{\circ}\text{C}$
 Short-term resistant: $t_{mal} = 110 \text{ }^{\circ}\text{C}$
 Max. operating pressure: $p_{max} = 10 \text{ bar}$
 Linear expansion coefficient: $2.3 \times 10^{-5} [\text{K}^{-1}]$
 Mean heat conduction coefficient: $\lambda = 0.45 \text{ W/mK}$
 Heat transmission resistance: $R_{\lambda} = 0.0045 \text{ m}^2\text{K/W}$