


## Manifold cabinet UF in-wall

PG 080

- Built-in frame and cupboard housing made of hot-dip galvanised sheet steel
- Front door and front frame white powder-coated (RAL 9016)
- Removable front cover plate, integrated slide-in door with locking bolt

Installation depth: 93–110 mm

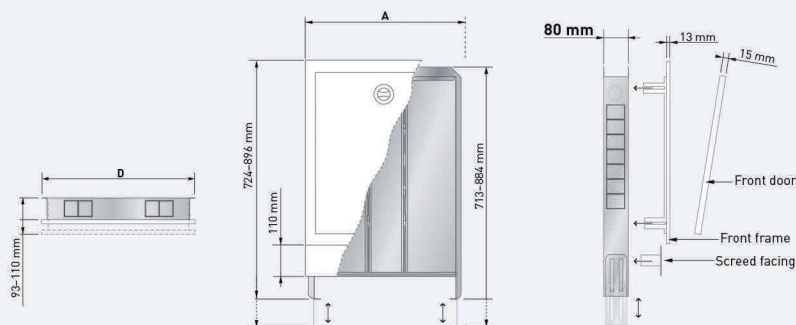


Part No.	A (frame)	D (niche dim.)	VarioManifold 5.0	Pumped VarioManifold 5.0	Pump Microstation	PKU	Weight/PKU	€/pce.
VSU1	459 mm	435 mm	1–4 circuits	–	1–2 circuits	1 pce.	8.6 kg	99.50
VSU2	598 mm	574 mm	5–7 circuits	2–4 circuits	–	1 pce.	10.6 kg	110.50
VSU3	898 mm	874 mm	8–13 circuits	5–10 circuits	–	1 pce.	15.0 kg	137.50
VSU4	1198 mm	1174 mm	14–17 circuits	11–15 circuits	–	1 pce.	19.5 kg	166.00

## Manifold cabinet on-wall

PG 080

- Cupboard housing made of hot-dip galvanised sheet steel
- White, powder-coated (RAL 9016)
- Integrated slide-in door with locking bolt
- Removable pipe diversion bar
- With rear wall

Max installation depth for manifolds: 120 mm

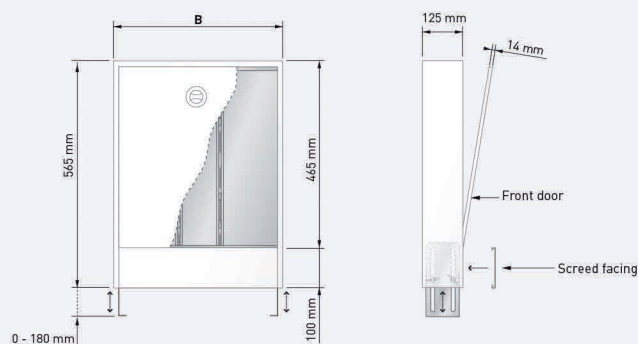

Part No.	B [mm]	VarioManifold 5.0	Pumped VarioManifold 5.0	Pump Microstation	PKU	Weight/PKU	€/pce.
VSA1	452	2–3 circuits	–	1–2 circuits	1 pce.	7.8 kg	83.50
VSA2	652	1, 4–7 circuits	2–6 circuits	–	1 pce.	10.6 kg	96.50
VSA3	952	8–13 circuits	7–12 circuits	–	1 pce.	13.4 kg	113.00
VSA4	1252	14–17 circuits	13–15 circuits	–	1 pce.	16.2 kg	135.50

PKU = packaging unit, PG = product group; all prices excluding sales tax.