

TECHNISCHE DATASHEET  
AWP 618 BRINE 400V

**AT-TEC**  
WARMTEPOMPEN





<b>General Data</b>		
Power Range	B0/W35: 4 - 16	[kW]
Energy class VL 35°C	A++ (from 09/2019: A+++)	[-]
Energy class VL 55°C	A++	[-]
Max. Flow temperature	62,0	[°C]
<b>Electrical Data</b>		
International Protection Marking	IP 20	[-]
Supply control	1/N/PE, 230V, 50Hz	[V, Hz]
Rated Input control	28	[W]
Cos(φ) control	0,90	[-]
Fuse control	1x B13	[-]
Supply compressor	3/N/PE, 400V, 50Hz	[V, Hz]
Operating current compressor	4,83	[A]
Starting current compressor	9 / -	[A / A]
Cos(φ) compressor	0,98	[-]
Fuse compressor	3x C16	[-]
<b>Sound power level Data acc. EN12102</b>		
Nom. Sound power level heat pump	45,5	[dB(A)]
Max. Sound power level heat pump	53,9	[dB(A)]
<b>Refrigerant circuit Data</b>		
Compressor - Type	Scroll	[-]
Refrigerant - Type	R410a	[-]
Refrigerant - Amount	3,8	[kg]
Refrigerant - Fluid Group	2	[-]
Refrigerant - GWP	1927	[-]
Compressor Oil - Type	3MA-POE	[-]
Compressor Oil - Amount	1,18	[l]
<b>Heating Side</b>		
Condenser - Type	Plate heat exchanger	[-]
Condenser - Material	Stainless steel, copper brazed	[-]
Condenser - Flowrate (5K)	2,9	[m³/h]
Condenser pressure loss	4,6	[kPa]
Circulation pump - Type	external circulation pump	[-]
Circulation pump - residual head	-	[mWs]
Circulation pump - max. power	-	[W]
<b>Source Side</b>		
Evaporator - Type	Plate heat exchanger	[-]
Evaporator - Material	Stainless steel, copper brazed	[-]
Evaporator - Flowrate (3K)	4,3	[m³/h]
Evaporator - Pressure loss	20,4	[kPa]
Source - Type	external circulation pump	[-]
Source - residual head	-	[mWs]
Source - max. Power	-	[W]

**Performance Data\***


Operating point	Comp. speed	Heating capacity	Cooling capacity	Rated Input	COP
B0/W35	54%	8,9	7,0	1,9	4,72
B0/W35	100%	15,8	12,1	3,6	4,36
B0/W55	100%	14,3	9,3	5,0	2,88
B0/W35	Minimal	4,4	3,4	1,0	4,55
B0/W55	Minimal	5,2	3,2	2,0	2,60

Climate: warmer	35°C	SCOP	5,43
		$\eta_s$	214
	55°C	SCOP	4,11
		$\eta_s$	161
Climate: average	35°C	SCOP	5,51
		$\eta_s$	217
	55°C	SCOP	4,28
		$\eta_s$	168
Climate: colder	35°C	SCOP	5,53
		$\eta_s$	218
	55°C	SCOP	4,38
		$\eta_s$	172

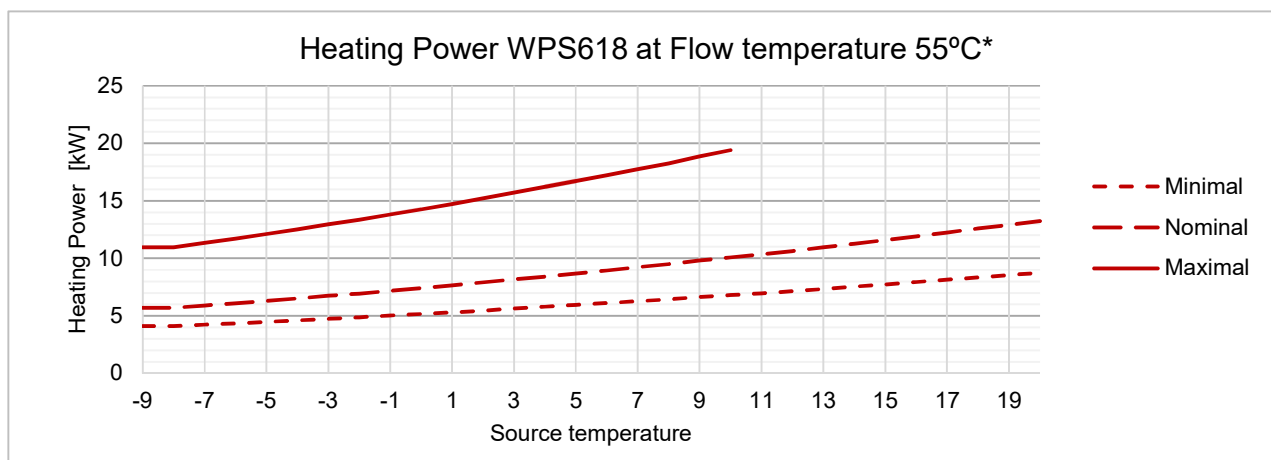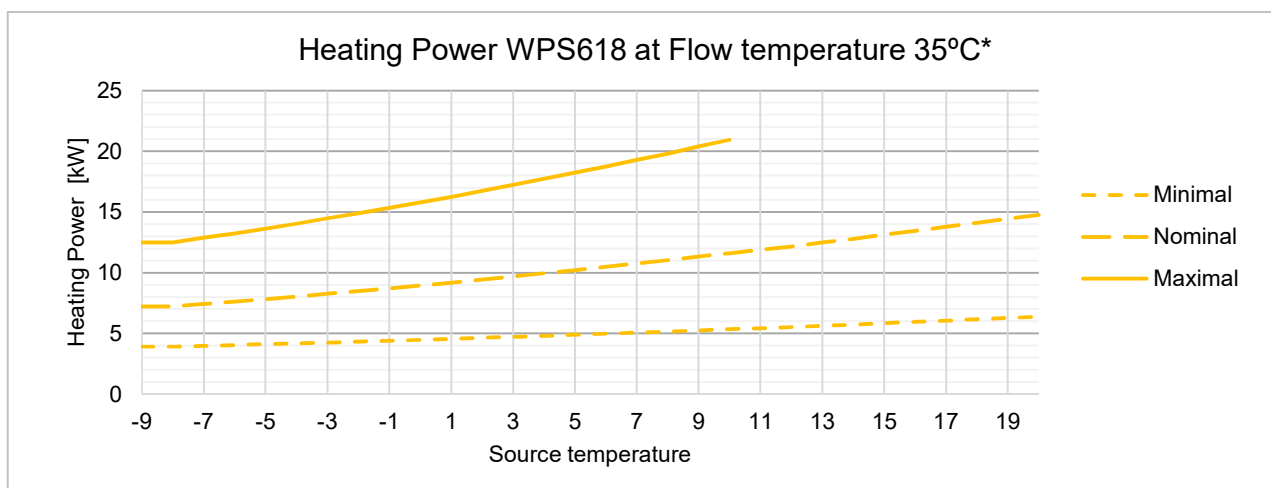

\* Compressive performance deviations of up to 10% are possible. All informations without guarantee: typographical and printing errors reserved.

## Operating limit

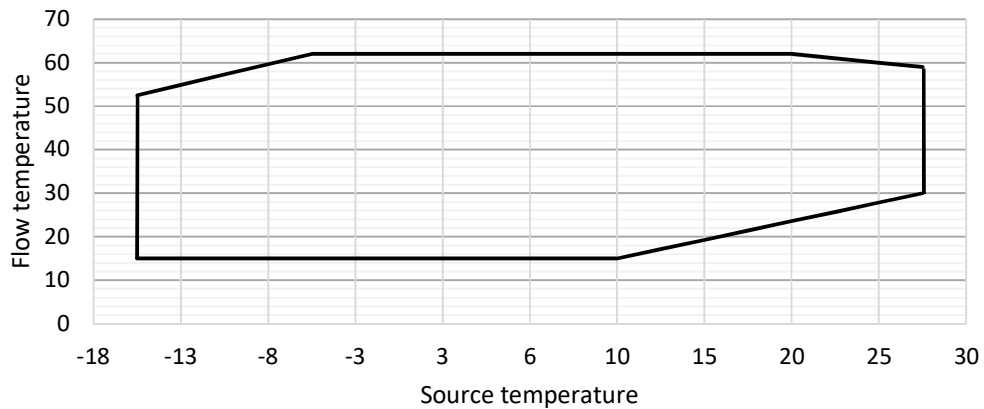

## Connection measurements


Heat Pump Dimensions (H x W x D)

[mm] 1.350 x 600 x 650

Heat Pump Weight

[kg] 174

- A: Source Inlet, G1" MT
- B: Heating Outlet, G1" MT
- C: Source Outlet, G1" MT
- D: Heating Inlet, G1" FT
- E: Electrical Inlet
- F: not in usage
- G: not in usage

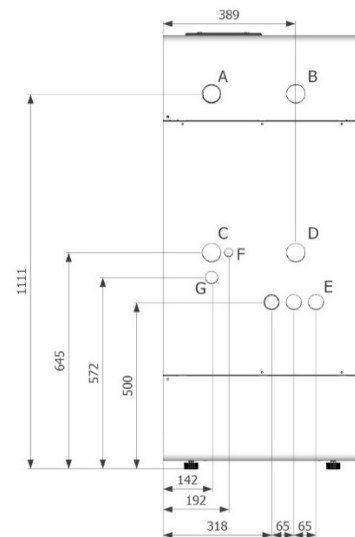

## Free spaces

- A: 400mm
- B: 400mm
- C: 200mm
- D: 600mm
- E: 400mm

